

INTRODUCING THE NEW 14LD DUMP TRAILER



The 14LD by Big Tex Trailers is a durable and capable dump trailer engineered to perform in even the toughest of environments. Designed to get the job done, the 14LD is no frills—meaning you don't have to pay for features and optional equipment that you may not need for your specific application. Featuring the same quality components and craftsmanship that you expect from a Big Tex dump trailer, the 14LD has the strength and versatility to conquer most loads. If you're looking for a hardworking, well-built dump trailer, at a price that won't break the bank, the 14LD is perfect for you!






BigTex
TRAILERS®


www.bigtextrailers.com/14LD

14LD | LOW PROFILE DUMP TRAILER

BigTex TRAILERS®

www.bigtextrailers.com/14LD

 GVWR: 14,000#
  EMPTY WEIGHT: 3,555#
  LENGTH: 14'
  BED WIDTH: 83" WIDE
  COUPLER: Adj. 2-5/16" Demco EZ Latch

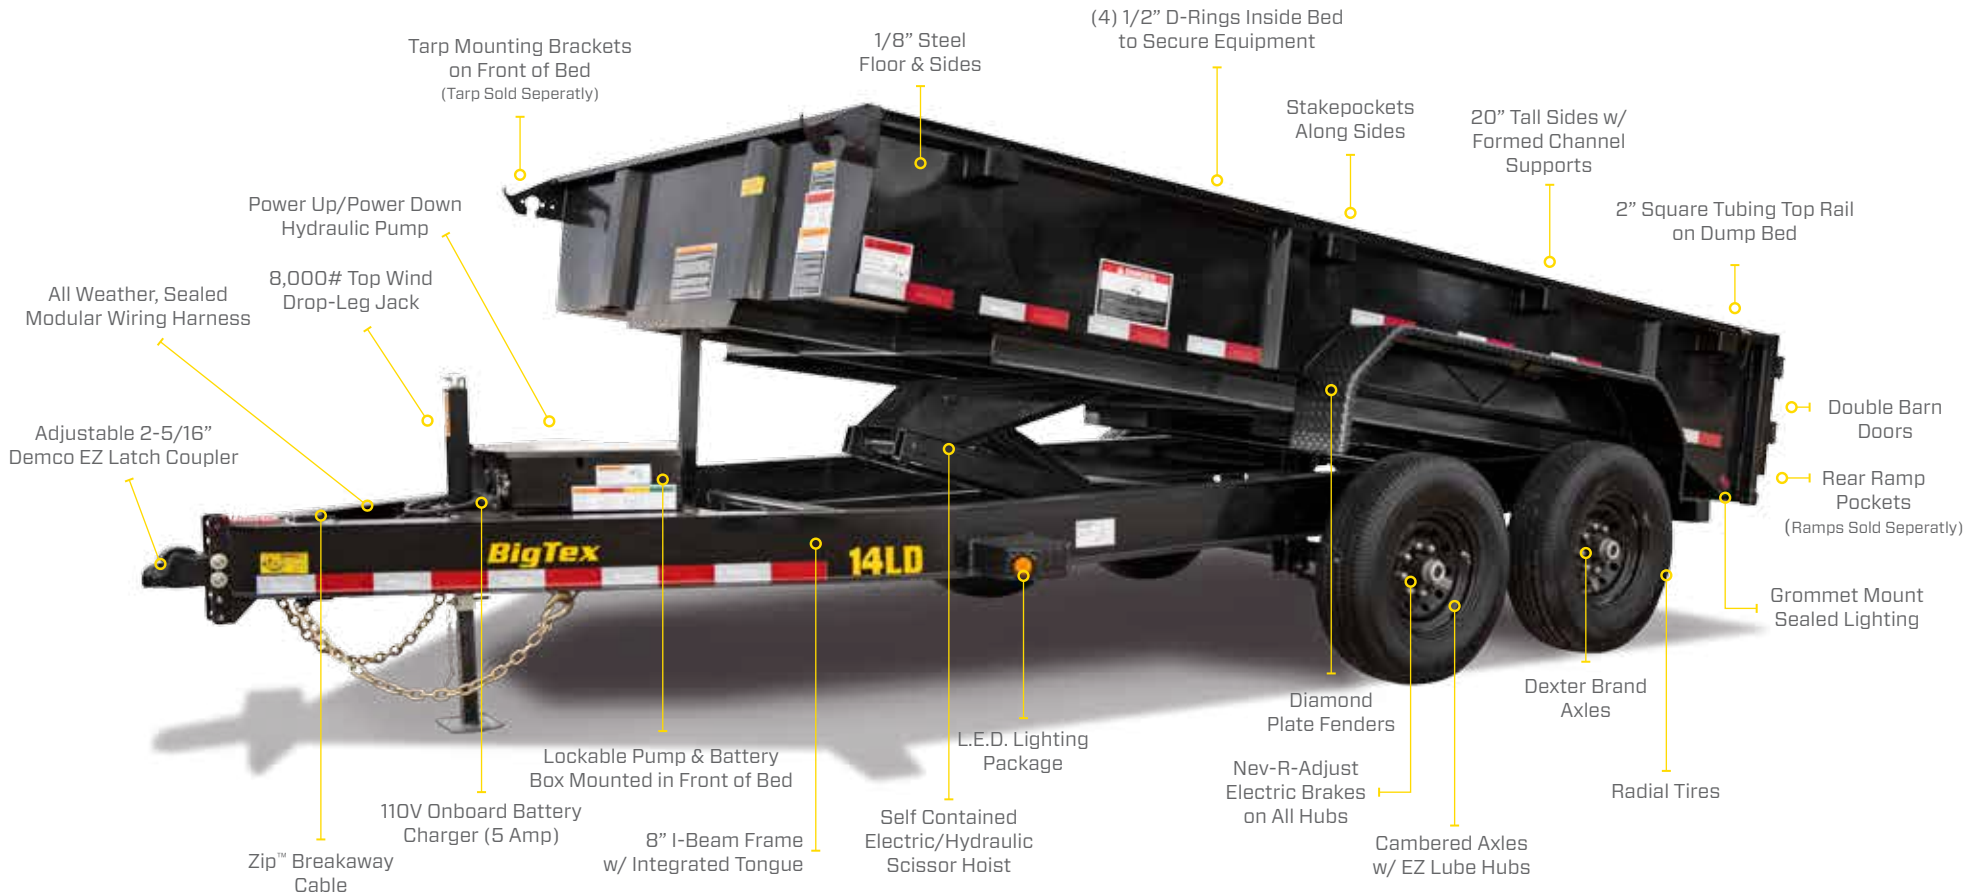

5-AMP ONBOARD BATTERY CHARGER

After a long day of work, plug an extension cord into the onboard 5-Amp battery charger on the 14LD to recharge and get ready for the next challenge.



FORMED I-BEAM FRAME AND TONGUE

For the ultimate in strength and durability, the 14LD features a formed I-beam frame with integral tongue. No cuts. No fishplate. Just a sturdy frame design that will last the test of time.



STRENGTH & VERSATILITY

The 14LD is equipped with a 2" square tubing structural top rail for added strength and durability as well as stakepockets along the sides for added cargo control and to support after-market side extensions.

14LD

GENERAL DUTY LOW PROFILE DUMP



GVWR: 14,000#



EMPTY WEIGHT: 3,555#



LENGTH: 14'



BED WIDTH: 83" WIDE



COUPLER: Adj. 2-5/16" Demco EZ Latch

BigTex TRAILERS

www.bigtextrailers.com/14LD

SPECIFICATIONS

G.V.W.R.	14,000#
G.A.W.R. (Ea. Axle)	7,000#
COUPLER	Adjustable 2-5/16" 18,000# Demco EZ Latch
SAFETY CHAINS	3/8" Grd. 70 w/Safety Latch Hook (2 each)
JACK	8,000# Top Wind Drop Leg
TONGUE	Integral with Frame (8" I-Beam, 10#)
MAIN FRAME	8" I-Beam, 10#
DUMP BODY CRMS	3" Channel
DUMP BODY SIDES	20" Tall Sides (12 Gauge)
DUMP BODY TOP RAIL	2" x 2" Square Tubing
FENDERS	9" x 72" 14 Ga. Diamond Plate Double Square Broke
AXLE	(2) 7,000# Axles w/EZ Lube Hubs & Elec. Brakes
SUSPENSION	Multi-Leaf Spring w/Equalizer
TIRE	ST235/80 R-16 Load Range E
WHEEL	16" x 6"; Black Mod, 8 Bolt
FLOOR	1/8" Smooth Steel
LIGHTS	L.E.D. D.O.T Stop, Tail, Turn & Clearance
ELEC. PLUG	7-Way RV

OPTIONAL EQUIPMENT

Category	Code	Description
COUPLER	AP	Adjustable Pintle in Channel ILO Coupler
TIRE/WHEEL	SP	Spare Tire (ST235/80 R-16 LR-E)
RAMPS	6SIR	(2) 6.5' Slide-In Ramps
RAMPS	STAB	Rear Stabilizer Stands- Set of (2)
CARGO CONTROL	TARP	Crank Style Roll Tarp

* Selecting this Option(s) will move unit to Specialty Manufacturing
Line potentially causing extended lead times

WEIGHTS & CAPACITIES

Empty Weight	Payload	Box Capacity
3,555#	10,445#	5.9 Cubic Yards



DIMENSIONS

	A	B	C
14'	168"	100"	68"

